POWER YOUR FUTURE Weichai Generator LG1100WP

12M33D1320E200

Prime Power: 1100W/1375KVA Standby Power: 1210W/1512KVA



Weichai Baudouin Series 500KVA--42000KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value Designed and built to last.

SAFETY

Operate safely in accordance with proper operation manual.
To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

FUAN LONGKAI POWER CO., LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian,China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG1100WP
Rated prime power	kva	1375
Rated standard power	kva	1512
Rated voltage line to line	V	400/230
Rated current	А	1985
Maximun sound level	dB(@7m)	≤103

Engine-Weichai		
Model	12M33D1320E200	
Aspiration	Turbocharging and intercooling	
Fuel system	Mechanical Pump+Electronic Speed Governor	
No. cylinders		V 12
Displacement	Liquid	39.2
Bore*Stroke	mm	150*185
Compression ratio		15:01
Rated speed	r/min	1500
Rated net power(with fan)	Kw	1200
Governor type		EFC Electrical
Start Motor	V	24

Exhause System		
Exhause gas flow	L/s	7315.4
Exhause gas temp	°C	550
Max back pressure	kPa	7.5

Aspiration System

kPa	≤3
kPa	/
L/s	7038
	kPa

Fuel System		
100% load(Prime power)	L/h	268.6
75% load(Prime power)	L/h	/
50% load(Prime power)	L/h	/
Fuel tank capacity	L	2500
	(Exter	rnal Fuel Tank)
Lubrication System		
Oil capacity	L	117
Oil consumption	g/kwh	0.3
Oil pressure	kPa	400-650

(continuous operation)

Cooling System

Coolant capacity	L	83
Thermostat operation range	$^{\circ}\mathrm{C}$	80-92
Max water temperature	°C	103

Alternator		
Model	LONGKAI	LK734B
	STAMFORD	PI734B-S6L1D-H4
Phase		3
Voltage	V	400/230
Wiring Type	3 Phase 4 wire, Y type	
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	1120
Exciter Type	Brushless, self-excitation	
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000
Controller-DEEPSEA		
Model		DSE6120MK3
Protective functions:		
Low oil pressure		
High water temperature		
High/low voltage		
High Engine Temperature	e and Overspe	ed.
Voltage regulator frequen	cy regulator	
Emergency stop	-	

Start failure



Control Module Options



- Auto generator control module
- Control module with" Three Remote Control" functions

1/0

- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet


LG1100WP

LONGKAI


Standard Features

Engine(Weichai Baudouin)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Unit Dimensions(Basic unit)

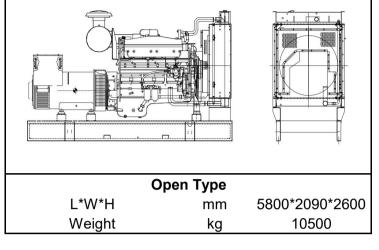

Options Battery charge Ο Engine heater Ο Alternator heater \bigcirc PMG Ο Water oil separator Ο Daily fuel tank \bigcirc Remote control panel Ο Automatic transfer switch/ATS \bigcirc Switch box \bigcirc Standard: • Options:0

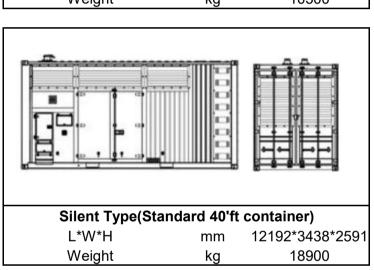

Warranty*

Weichai Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.