POWER YOUR FUTURE

Weichai Generator LG400WP

6M26D484E200

Prime Power: 400KW/500KVA

Standby Power: 440KW/550KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Weichai Baudouin Series 500KVA--42000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com





Technical Data

Model		LG400WP
Rated prime power	kva	500
Rated standard power	kva	550
Rated voltage line to line	V	400/230
Rated current	Α	722
Maximun sound level	dB(@7m)	≤100

Engine-Weichai		
Model		6M26D484E200
Aspiration		Turbocharged and aftercooled
Fuel system	Mechanical Pur	np+Electronic Speed Governor
No. cylinders		6 in line
Displacement	Liquid	15.9
Bore*Stroke	mm	150*150
Compression ratio		15.7: 1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	440
Governor type	mechani	cal speed governors
Start Motor	V	24

Exhause System		
Exhause gas flow	L/s	2149
Exhause gas temp	° F (° C)	550
Max back pressure	in Hg	7.5

Aspiration System		
Max inlet pressure	kPa	≤3
Combustion volume	L/s	/
Air flow	L/sec	2061

Fuel System		
100% load(Prime power)	L/h	97.7
75% load(Prime power)	L/h	/
50% load(Prime power)	L/h	/
Fuel tank capacity	L	780

Lubrication System		
Oil capacity	L	61
Oil consumption	g/kwh	0.3
Oil pressure	kPa	400-650
(continuous operation)		

Cooling System		
Coolant capacity	L	38.7
Thermostat operation range	$^{\circ}\!\mathbb{C}$	77-97
Max water temperature	$^{\circ}$ C	95

LONGKAI	LK544C
STAMFORD H	CI544C-S5L1D-C4/S5L1S-C4
	3
V	400/230
3 Phas	se 4 wire, Y type
	1
	0.8
Hz	50
KW	400
Brushles	s, self-excitation
%	±0.5
	IP 23
	H/H
m	≤1000
	V 3 Phas Hz KW Brushles

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- Synchronising control modules
- ■Power output cabinet



Standard Features

otalidara i dataroo
Engine(Weichai Baudouin)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

Options

Options		
Battery charge		0
Engine heater		\bigcirc
Alternator heater		\bigcirc
PMG		\bigcirc
Water oil separator		\bigcirc
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	S	\bigcirc
Switch box		\bigcirc
Standard: ●	Options:0	

Warranty*


Weichai Engine


12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

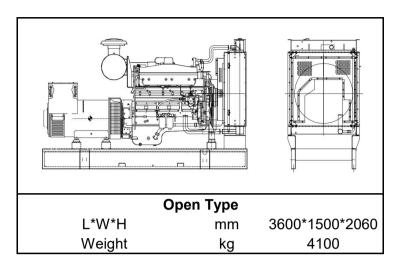

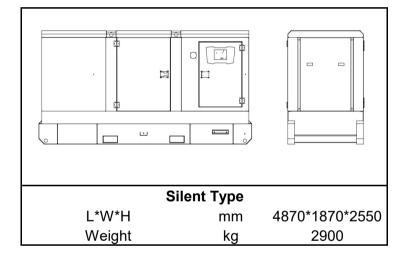



More information, pls refer to our web-site: www.longkaipower.com $\,$

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.